

In response to that a user body touches an object, send a second mechanical wave that is used to form a haptic signal at a touch position of the object with a first mechanical wave generated by the user body

S110

FIG. 1a

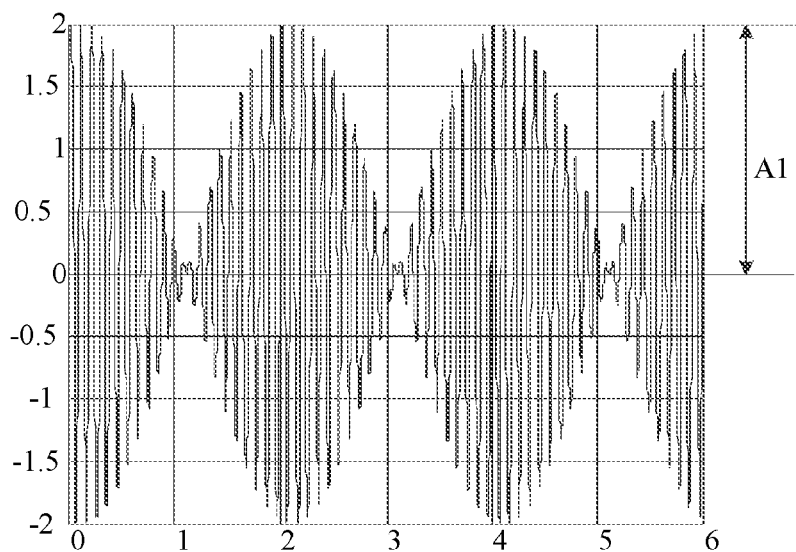


FIG. 1b

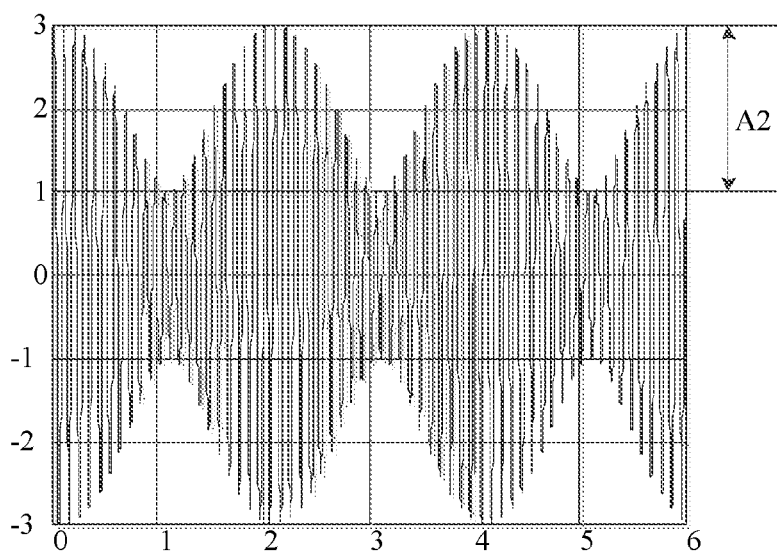


FIG. 1c